

HBZX4XN-KFS822-S000

Shell body style / Model id: ZX - Fixed receptacle
Without earthing tag

Locking system: Push-pull


Housing material: Brass

Contact Type: Solder female contact


Insulator: PEEK

Socket / Receptacle: Fixed panel rear mounted

Suggested matching part: [HBTX4XN-KMS822-M100](#)

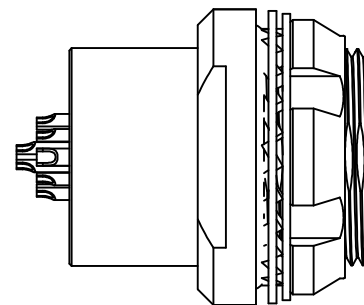

*Illustrations are simplified for illustrative purposes only
Ask for 3D models and detailed dimensions
ella_spring@vip.163.com*

Electrical Configuration		
Number of contacts Mixed contact	2 + 2	
Panel cut-out diameter (ΦA)	16.1 mm	
Contact Dia.	2*0.9 mm +2*2.3 mm	
Keying	N	

Pulling and Inserting Times	>5000
Humidity	Max. 95% at 40 °C
Temperature	-55 °C ~+125 °C
Vibration	10~20000HZ,15g
Mechanical Shock	100g·6ms
IP Rating	IP68
R (max)	2*≤5.0mΩ + 2*≤1.5mΩ
Rated Current(A)	2*6.3 + 2*20.0
Rated Voltage(V)	875
Wire Size/AWG(Max.)	2*22 + 2*12