

HBZX4XN-KFSM02-S000

Shell body style / Model id: ZX - Fixed receptacle
Without earthing tag

Locking system: Push-pull


Housing material: Brass

Contact Type: Solder female contact


Insulator: PEEK

Socket / Receptacle: Fixed panel rear mounted

Suggested matching part: [HBTX4XN-KMSM02-M100](#)

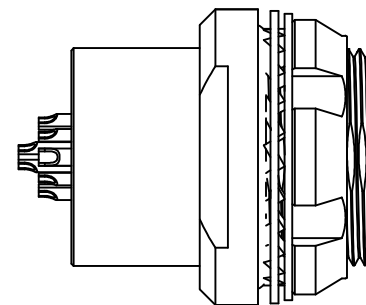

*Illustrations are simplified for illustrative purposes only
Ask for 3D models and detailed dimensions
ella_spring@vip.163.com*

Electrical Configuration		
Number of contacts Low Voltage	2	
Panel cut-out diameter (ΦA)	16.1 mm	
Contact Dia.	1.6 mm	
Keying	N	

Pulling and Inserting Times	>5000
Humidity	Max. 95% at 40 °C
Temperature	-55 °C ~+125 °C
Vibration	10~20000HZ,15g
Mechanical Shock	100g·6ms
IP Rating	IP68
R (max)	≤2.5mΩ
Rated Current(A)	15.0
Rated Voltage(V)	1000
Wire Size/AWG(Max.)	14