

TGG.0B.309.CLAD32Z

Shell body style / Model id: TG - Straight plug, cable collet nut for fitting a bend relief

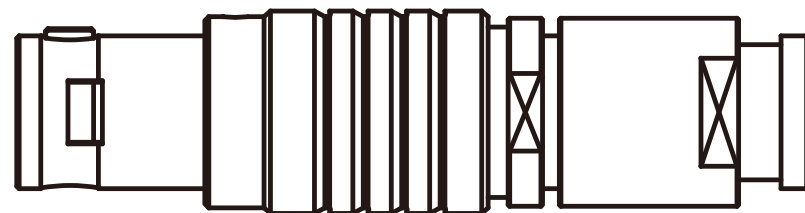
Locking system: Push-pull

Housing material: Brass



Contact Type: Solder male contact

Insulator: PPS

Suggested matching part: [ZGG.0B.309.CLL](#)



*Illustrations are simplified for illustrative purposes only
Ask for 3D models and detailed dimensions
ella_spring@vip.163.com*

Electrical Configuration		
Number of contacts Low Voltage	9	
Jacket cable outside diameter (mm)	2.1 - 3.0 mm	
Contact Dia.	0.5 mm	
Keying	1 key (alpha=0)	

Pulling and Inserting Times	>5000
Humidity	Max. 95% at 60 °C
Temperature	-45 °C ~+125 °C
Vibration	10~20000HZ,15g
Mechanical Shock	100g·6ms
IP Rating	IP50
R (max)	≤15.0mΩ
Rated Current(A)	2.0
Rated Voltage(V)	500
Wire Size/AWG	28~30