

TGG.2K.314.CLAC65

Shell body style / Model id: TG - Straight plug, cable collet


Locking system: Push-pull

Housing material: Brass

Contact Type: Solder male contact





Insulator: PPS

Suggested matching part: [ZGG.2K.314.CLL](#)

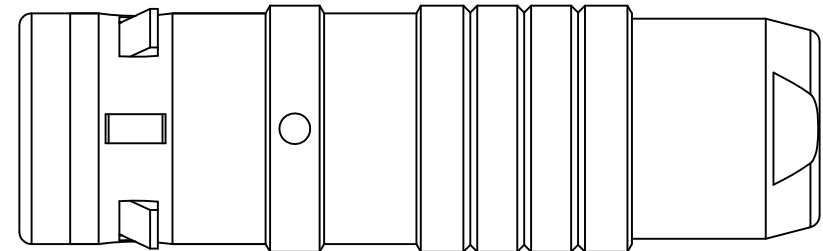

*Illustrations are simplified for illustrative purposes only
Ask for 3D models and detailed dimensions*

ella_spring@vip.163.com

Electrical Configuration		
Number of contacts Low Voltage	14	
Jacket cable outside diameter (mm)	6.1 - 6.5 mm	
Contact Dia.	0.7 mm	
Keying	1 key (alpha=0)	

Pulling and Inserting Times	>5000
Humidity	Max. 95% at 60 °C
Temperature	-45 °C ~+125 °C
Vibration	10~20000HZ,15g
Mechanical Shock	100g·6ms
IP Rating	IP68
R (max)	≤12.5mΩ
Rated Current(A)	6.5
Rated Voltage(V)	750
Wire Size/AWG	22~26