

ZCG.2B.307.CLLV

Shell body style / Model id: ZC - Fixed receptacle with two nuts

Locking system: Push-pull

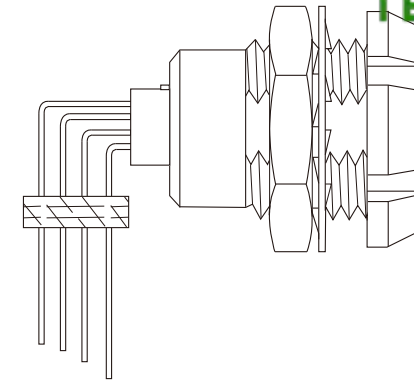
Housing material: Brass

Contact Type: PCB elbow female contact




Insulator: PPS

Socket / Receptacle: Fixed panel rear mounted

Suggested matching part: [TGG.2B.307.CLAD52](#)
[TGG.2B.307.CLAD52Z](#)



*Illustrations are simplified for illustrative purposes only
 Ask for 3D models and detailed dimensions
ella_spring@vip.163.com*

Electrical Configuration		
Number of contacts Low Voltage	7	
Panel cut-out diameter (ΦA)	15.1 mm	
Contact Dia.	1.3 mm	
Keying	1 key (alpha=0)	

Pulling and Inserting Times	>5000
Humidity	Max. 95% at 60 °C
Temperature	-45 °C ~+125 °C
Vibration	10~20000HZ,15g
Mechanical Shock	100g·6ms
IP Rating	IP50
R (max)	≤5.0mΩ
Rated Current(A)	11.0
Rated Voltage(V)	875