
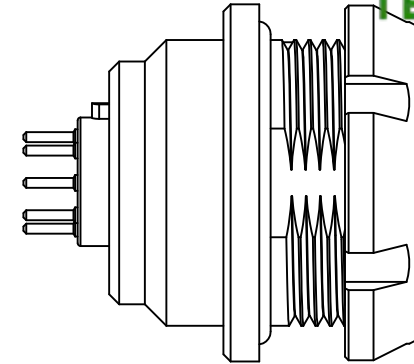




ZEG.2K.302.CLLN

Shell body style / Model id: ZE - Fixed receptacle, nut fixing
 Locking system: Push-pull
 Housing material: Brass
 Contact Type: PCB straight female contact
 Insulator: PPS
 Socket / Receptacle: Fixed panel rear mounted
 Suggested matching part: [TGG.2K.302.CLAC65](#)
[TGG.2K.302.CLAC65Z](#)



*Illustrations are simplified for illustrative purposes only
 Ask for 3D models and detailed dimensions
ella_spring@vip.163.com*

Electrical Configuration		
Number of contacts Low Voltage	2	
Panel cut-out diameter (ΦA)	20.2 mm	
Contact Dia.	2.0 mm	
Keying	1 key (alpha=0)	

Pulling and Inserting Times	>5000
Humidity	Max. 95% at 60℃
Temperature	-45℃ ~+125℃
Vibration	10~20000HZ,15g
Mechanical Shock	100g·6ms
IP Rating	IP68
R (max)	≤3.0mΩ
Rated Current(A)	25.0
Rated Voltage(V)	1000
Wire Size/AWG	14~16